

# Datasheet

SERENE DC CEILING FAN-1320MM, 52"

CAT. NO. CF13DC4BWE



A brand of **legrand**



**6 YEAR**  
WARRANTY



INCLUDES  
6 SPEED FAN  
CONTROLLER  
WITH TIMER



**RUST FREE**  
**ABS**  
PLASTIC

Fan Speed	RPM*	Power (Watts)	Airflow (m³/h)
1	94	5	5100
2	117	8	6300
3	145	12	7800
4	168	18	9900
5	196	26	11400
6	230	40	12600

\*RPM: Rotations Per Minute

## PRODUCT SPECIFICATIONS

Cat. No.	CF13DC4BWE
Colour/Finish	White
Supply Voltage	230-240 V ~ 50 Hz
Motor Type	DC (Direct Current)
Maximum Power	40 W
Maximum RPM	230 RPM
Maximum Airflow	12600 m³/h
Blade Pitch	10.5°
Body and Canopy Construction	ABS plastic (rust free <sup>^</sup> )
Blade Material	ABS plastic (rust free <sup>^</sup> )
Blade size	1320 mm, 52"
Number of Blades	4
Ceiling Install	Hang sure canopy mounting (slope up to 13°)
Recommended Height	There should be at least 2.1 m between the lowest point of the ceiling fan blades and the floor
Remote Control	6 speed fan controller with 3 timers, forward/reserve mode, natural wind mode and fan ON/OFF + wall mounted holder
Includes	Motor assembly, 4 x ABS plastic blades, screw pack, fan remote control, 2x AAA batteries, mounting bracket, instruction manual

<sup>^</sup>Body, canopy and blades are made from ABS plastic, rust free does not apply to the metal downrod.

# Datasheet

## SERENE DC CEILING FAN-1320MM, 52"

CAT. NO. **CF13DC4BWE**



A brand of **legrand**

### FEATURES AND BENEFITS

- Powerful 40 W DC motor.
- DC motor is more powerful, quieter and uses less energy than an AC motor.
- ABS plastic ceiling fans are suitable for indoor or undercover outdoor areas not exposed to the weather.
- Body, canopy and blades are made from ABS plastic, making them rust free<sup>^</sup>.
- Moulded ABS plastic blades for high strength and durability, which are easy to clean.
- Pre-wired replaceable downrods for easy height extension, available in 750 mm and 1500 mm lengths.
- Coastal rated to withstand water damage due to salt found in the air.
- Fast connect wiring system and quick-fit blades system for ease and reduction of installation time.
- Reversible summer and winter mode to save energy for use all year round.
- Sleek and modern ceiling fan design with curvaceous blades to compliment any space.
- Natural wind mode varies the fan speed to simulate a natural breeze effect.
- 6 speed remote controller with timer included for greater control.


<sup>^</sup> Rust free does not apply to the metal downrod.

### HOW TO CHOOSE THE RIGHT CEILING FAN SIZE

Room size (m <sup>2</sup> )	Up to 7 m <sup>2</sup>	7 m <sup>2</sup> to 13 m <sup>2</sup>	13 m <sup>2</sup> to 20 m <sup>2</sup>
Recommended Fan Size (mm)	920 mm to 1220 mm	1220 mm to 1320 mm	1320 mm to 1420 mm
Recommended Fan Size (inches)	36" or 48"	48" or 52"	52" or 56"

### REGULATION REQUIREMENT

The Australia & New Zealand standard implies that the lowest point of the fan blades must be installed at least 2.1 m from the floor and the blades at least 300 mm from the nearest wall.

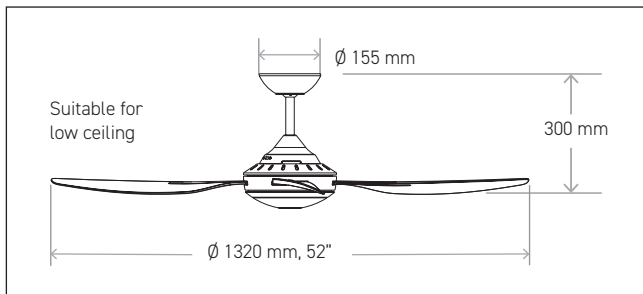

#### OPTIONAL ACCESSORIES (Sold separately)

##### Extension Downrods

Serene Ceiling Fan Extension Downrod  
750 mm x 21.5 mm White  
(CFSEDR750WE)

Serene Ceiling Fan Extension Downrod  
1500 mm x 21.5 mm White  
(CFSEDR1500WE)



### SHIPPING

Single Product			
Cat. No.	Barcode	Packaging Dimensions (mm)	Product Weight (kg)
CF13DC4BWE	9321001516255	595 x 330 x 317	6.4

Legrand - Australia  
1300 369 777  
www.hpm.com.au  
ABN 31 000 102 661

Legrand - New Zealand  
0800 476 009  
www.hpm.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subjected to change without prior notice.



LE145/0AA

07/2023